
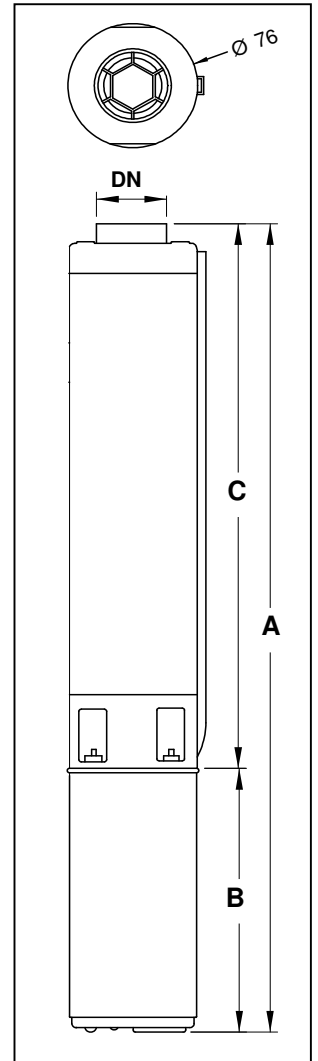


CURVAS DE FUNCIONAMENTO A 2850 rpm

Ensaio segundo a norma ISO 9906

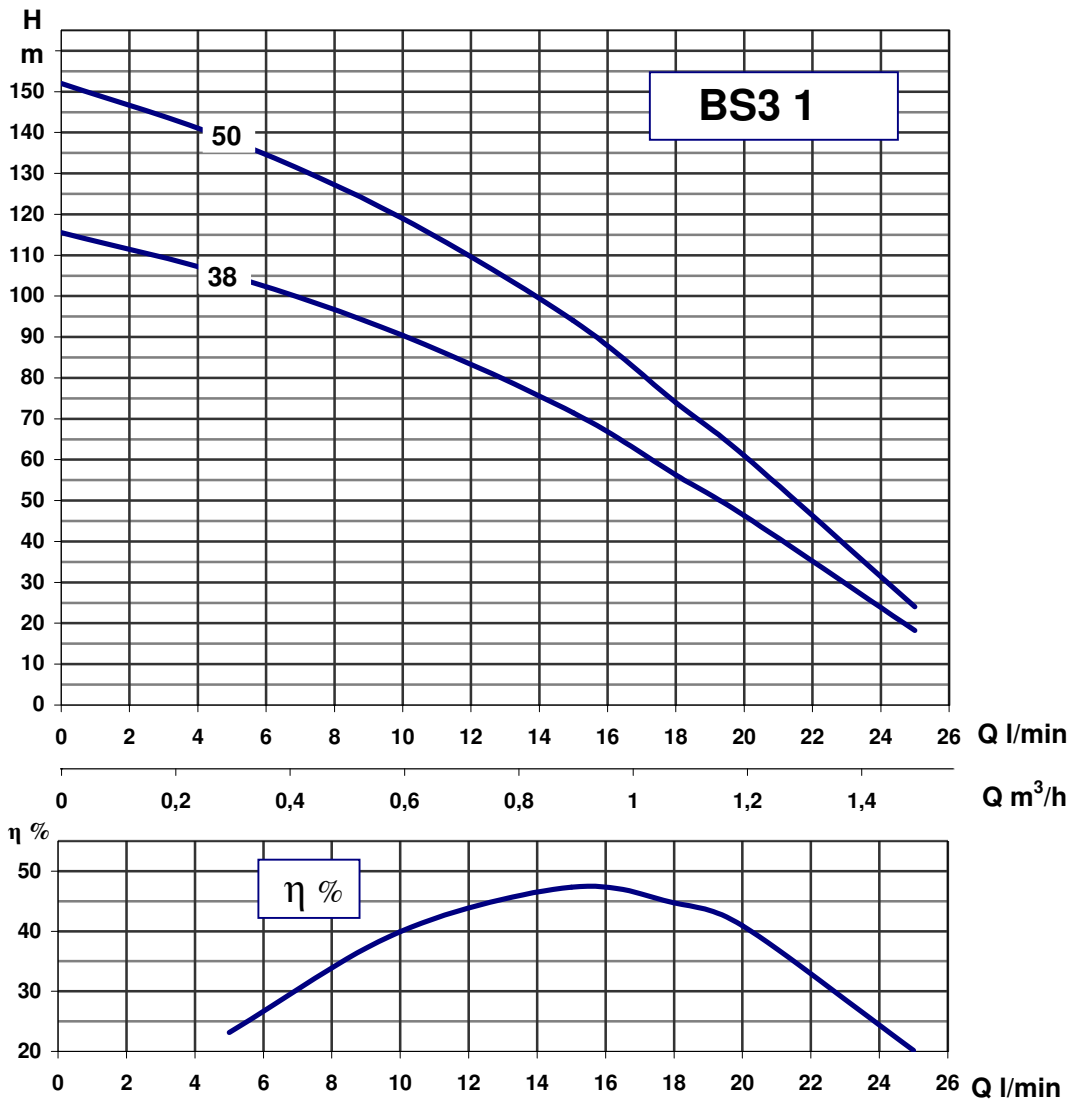

CARACTERÍSTICAS DE FUNCIONAMENTO A 2850 rpm

TIPO	VERSÃO 50 Hz	MOTOR		CONDENSADOR		Q - Débito							DIMENSÕES				
						m³/h	0	0,3	0,6	0,9	1,1	1,2	1,5	A	B	C	DN
						l/min	0	5	10	15	18	20	25				
BS3 1/38M	1~220/230	0,37	4,0	16	450									1246	387		
BS3 1/38T	3~380/415					1,6											1246
BS3 1/50M	1~220/230	0,55	5,1	20	450									1537	427		
BS3 1/50T	3~380/415					1,8											1537