
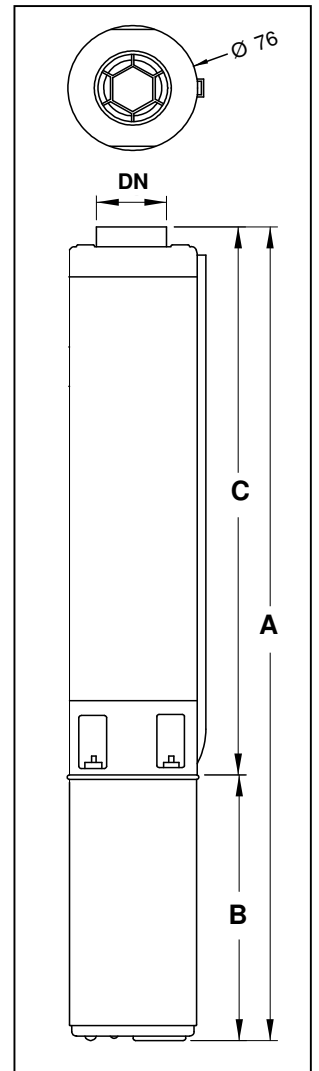


CURVAS DE FUNCIONAMENTO A 2850 rpm

Ensaio segundo a norma ISO 9906

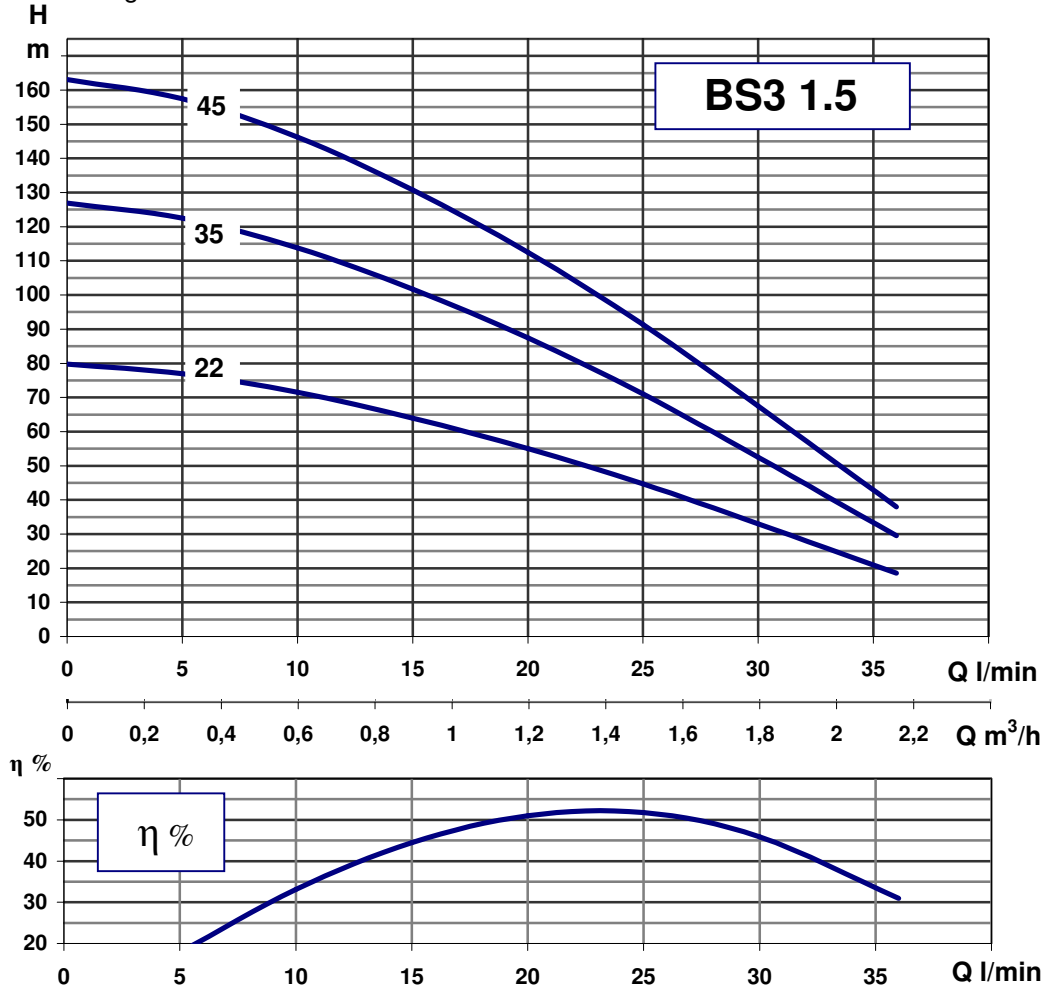

CARACTERÍSTICAS DE FUNCIONAMENTO A 2850 rpm

| TIPO | VERSÃO 50 Hz | MOTOR | | CONDENSADOR | | Q - Débito | | | | | | | | | | | DIMENSÕES | | | |
|-------------|-----------------|-------|-----|-------------|-----|----------------------------------|-----|-----|-----|-----|-----|-----|-----|------|-----|--|-----------|------|--------|----|
| | | | | | | m³/h | | | | | | | | | | | A | B | C | DN |
| | | | | | | 0 | 0,3 | 0,6 | 0,9 | 1,2 | 1,5 | 1,8 | 2,2 | | | | | | | |
| | | | | | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 36 | | | | | | | |
| | | | | | | H - Altura manométrica total (m) | | | | | | | | | | | | | | |
| BS3 1.5/22M | 1~220/230 | 0,37 | 4,0 | 16 | 450 | 80 | 77 | 72 | 64 | 55 | 45 | 33 | 19 | 966 | 387 | | | 579 | 1" 1/4 | |
| BS3 1.5/22T | 3~380/415 | | 1,6 | | | 966 | 387 | | | | | | | | | | | | | |
| BS3 1.5/35M | 1~220/230 | 0,55 | 5,1 | 20 | 450 | 127 | 123 | 114 | 102 | 88 | 71 | 53 | 30 | 1234 | 427 | | | 807 | 1" 1/4 | |
| BS3 1.5/35T | 3~380/415 | | 1,8 | | | 1234 | 427 | | | | | | | | | | | | | |
| BS3 1.5/45M | 1~220/230 | 0,75 | 7,2 | 25 | 450 | 163 | 158 | 146 | 131 | 113 | 91 | 68 | 38 | 1470 | 447 | | | 1023 | 1" 1/4 | |
| BS3 1.5/45T | 3~380/415 | | 2,7 | | | 1450 | 427 | | | | | | | | | | | | | |