





GRINDER PUMPS

The **PXGRIND** pumps are equipped with a grinding system that effectively reduces all destructible solid pieces and fibrous materials, such as paper, textile, plastics, etc into small particles so they can be led away through pipes of relatively small diameter.

DESIGN FEATURES

- Stainless steel cutter system
- Internal motor cooling system with "ECOFLU" (closed loop through a cooling jacket)
- Cartridge sealing system "Fast Seal"
- Easily adjustable channel impeller clearance system "Reducer" for improved performance and less clogging occurrences
- Oil tap drain
- Ductile multi channel impeller
- Fast lock assembly/disassembly feature with only two latch bolts for quick and easy volute/impeller inspection (major advantage is the significant reduction of man-hours)
- **PXFLOW** - SIEMENS motor parts standard IE1 or higher efficiency IE2 (premium efficiency IE3 as option)
- Motor inspection hole
- Cable entry on the side of the pump cover
- Handle in Stainless steel

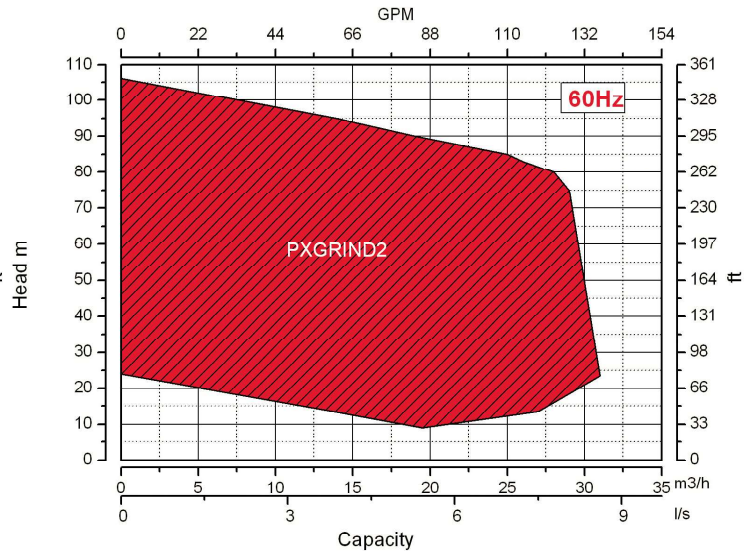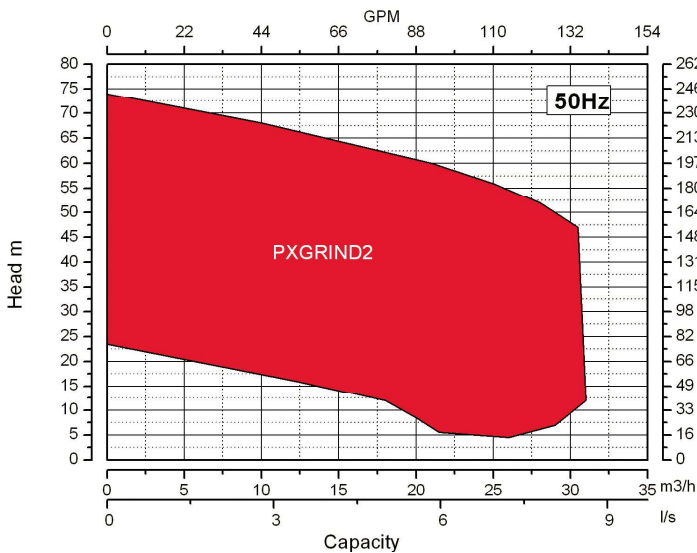

Model	PXGRIND2
Rating 50Hz	6.5-13.5 kW
Rating 60Hz	10-20 HP
Motor	2/4 pole
Pump outlet flange	50/2"
Pump inlet flange	Grinder
Impeller types	Channel
installation types available	wet/portable