
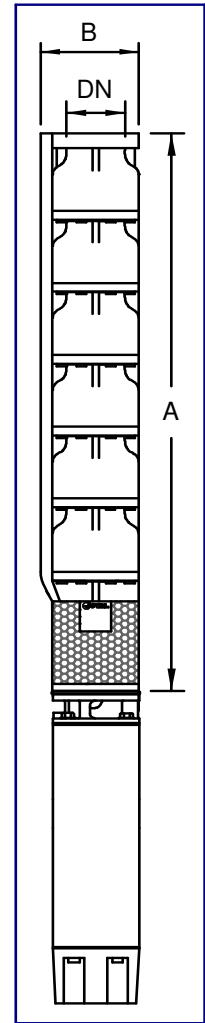


PERFORMANCE CURVES AT 2850 rpm
 Tested according to standard ISO 9906

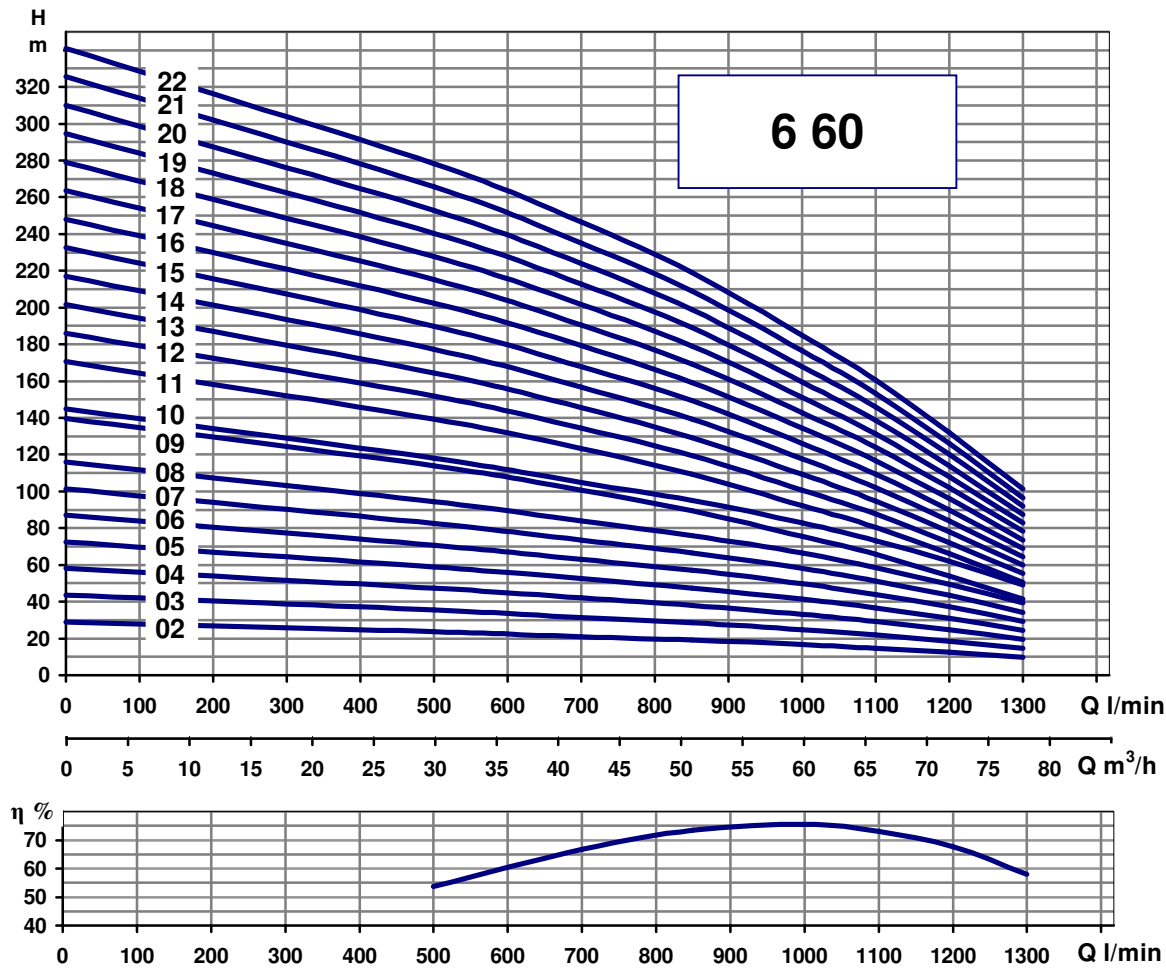

MODEL	MOTOR		Q - Flow								DIMENSIONS AND WEIGHT					
	kW	HP	m³/h	0	30	42	51	60	66	72	78	Motor	A	B	DN	kg
			l/min	0	500	700	850	1000	1100	1200	1300		mm	mm		
			H - Manometric head (m)													
660 02R	4	5,5	29	24	21	19	17	15	12	10	6"	607	153	G 3"	27	
660 03R	5,5	7,5	44	35	32	29	25	22	19	15	6"	724	153	G 3"	33	
660 04R	7,5	10	58	47	42	38	33	29	25	20	6"	841	153	G 3"	39	
660 05R	9,3	12,5	73	59	53	48	42	37	31	25	6"	958	153	G 3"	45	
660 06R	11	15	87	71	63	57	50	44	37	29	6"	1075	153	G 3"	51	
660 07R	13	17,5	102	83	74	67	58	51	43	34	6"	1192	153	G 3"	57	
660 08R	15	20	116	94	84	76	66	58	50	39	6"	1309	153	G 3"	63	
660 09	18,5	25	140	114	101	90	76	66	54	41	6"	1426	153	G 3"	69	
660 10R	18,5	25	145	118	105	95	83	73	62	49	6"	1543	153	G 3"	75	
660 11	22	30	171	139	123	109	92	80	66	51	6"	1660	153	G 3"	81	
660 12	26	35	186	152	134	119	101	88	72	55	6"	1777	153	G 3"	87	
660 13	26	35	202	164	146	129	109	95	78	60	6"	1894	153	G 3"	93	
660 14	30	40	217	177	157	139	118	102	84	64	6"	2011	153	G 3"	99	
660 15	30	40	233	190	168	149	126	110	90	69	6"	2128	153	G 3"	105	
660 16	37	50	248	202	179	159	134	117	96	74	6"	2245	153	G 3"	111	
660 17	37	50	264	215	190	169	143	124	102	78	6"	2362	153	G 3"	117	
660 18	37	50	279	228	202	179	151	131	108	83	6"	2479	153	G 3"	122	
660 19	37	50	295	240	213	189	160	139	114	87	6"	2596	153	G 3"	128	
660 20	45	60	310	253	224	199	168	146	120	92	6"	2713	153	G 3"	134	
660 21	45	60	326	266	235	209	176	153	126	97	6"	2830	153	G 3"	140	
660 22	45	60	341	278	246	219	185	161	132	101	6"	2947	153	G 3"	146	