
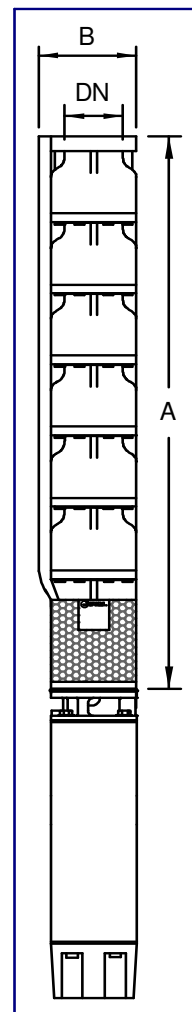


## PERFORMANCE CURVES AT 2850 rpm

Tested according to standard ISO 9906

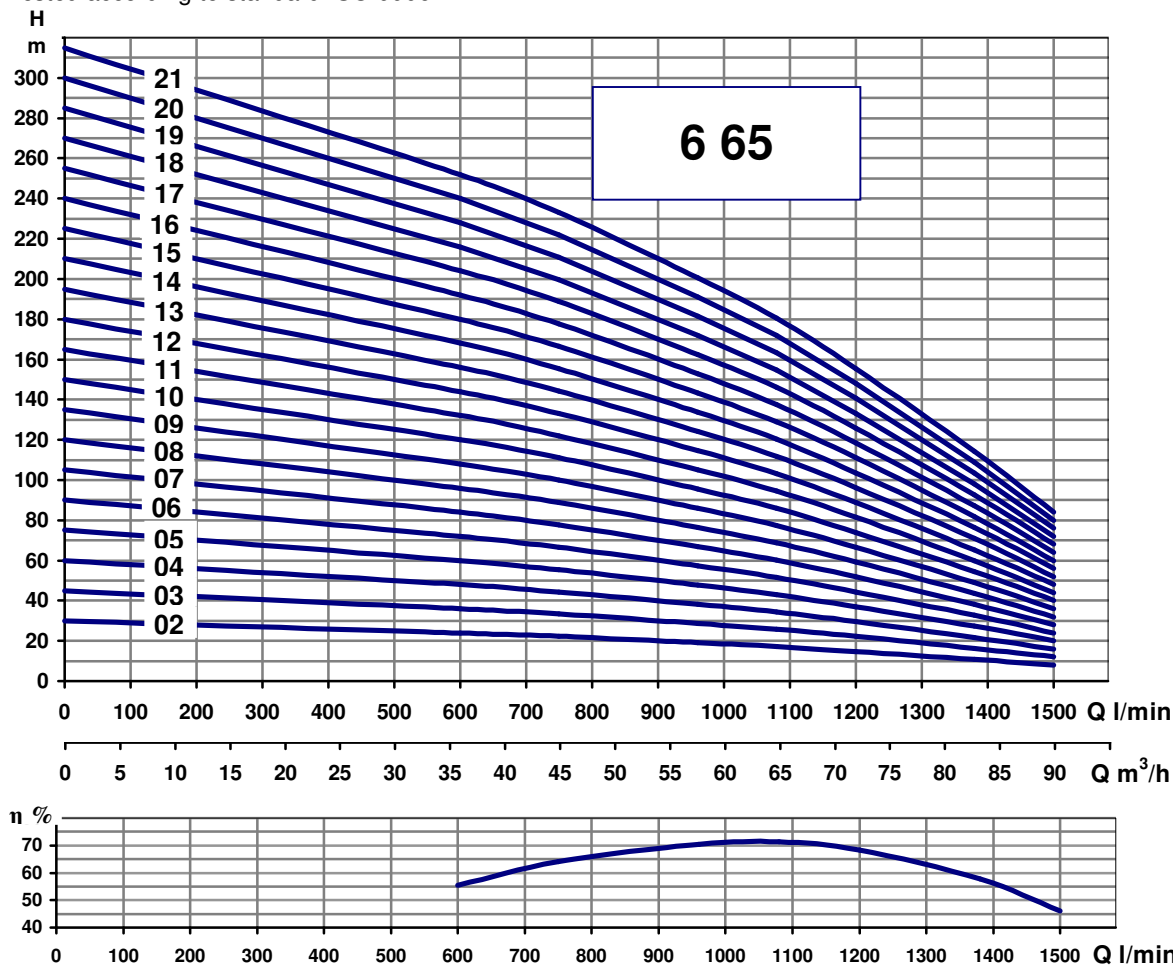

MODEL	MOTOR		Q - Flow								DIMENSIONS AND WEIGHT					
	kW	HP	m³/h	0	36	45	57.6	64.8	72	82.8	90	Motor	A mm	B mm	DN	kg
			l/min	0	600	750	960	1080	1200	1380	1500					
665 02	4	5,5	H - Manometric head (m)	30	24	22	19	17	15	11	8	6"	607	153	G 4"	27
665 03	7,5	10		45	36	33	29	26	22	16	12	6"	724	153	G 4"	33
665 04	9,3	12,5		60	48	44	38	34	30	22	16	6"	841	153	G 4"	39
665 05	11	15		75	60	56	48	43	37	27	20	6"	958	153	G 4"	45
665 06	13	17,5		90	72	67	57	52	44	33	24	6"	1075	153	G 4"	51
665 07	15	20		105	84	78	67	60	52	38	28	6"	1192	153	G 4"	57
665 08	18,5	25		120	96	89	76	69	59	44	32	6"	1309	153	G 4"	63
665 09	22	30		135	108	100	86	77	67	49	36	6"	1426	153	G 4"	69
665 10	26	35		150	120	111	96	86	74	55	40	6"	1543	153	G 4"	75
665 11	26	35		165	132	122	105	95	81	60	44	6"	1660	153	G 4"	81
665 12	30	40		180	144	133	115	103	89	65	48	6"	1777	153	G 4"	87
665 13	30	40		195	156	144	124	112	96	71	52	6"	1894	153	G 4"	93
665 14	37	50		210	168	155	134	120	104	76	56	6"	2011	153	G 4"	99
665 15	37	50		225	180	167	143	129	111	82	60	6"	2128	153	G 4"	105
665 16	37	50		240	192	178	153	138	118	87	64	6"	2245	153	G 4"	111
665 17	37	50		255	204	189	162	146	126	93	68	6"	2362	153	G 4"	117
665 18	45	60		270	216	200	172	155	133	98	72	6"	2479	153	G 4"	122
665 19	45	60		285	228	211	181	163	141	104	76	6"	2596	153	G 4"	128
665 20	45	60		300	240	222	191	172	148	109	80	6"	2713	153	G 4"	134
665 21	45	60		315	252	233	201	181	155	114	84	6"	2830	153	G 4"	140