
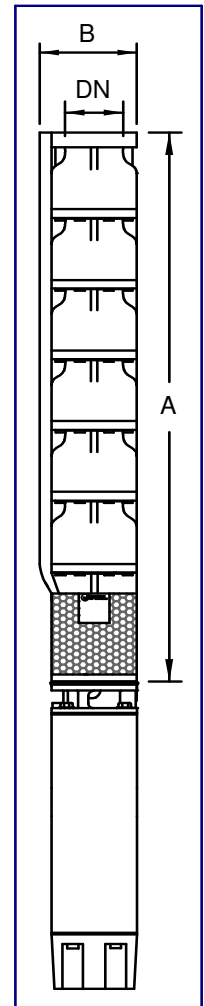


PERFORMANCE CURVES AT 2850 rpm
 Tested according to standard ISO 9906

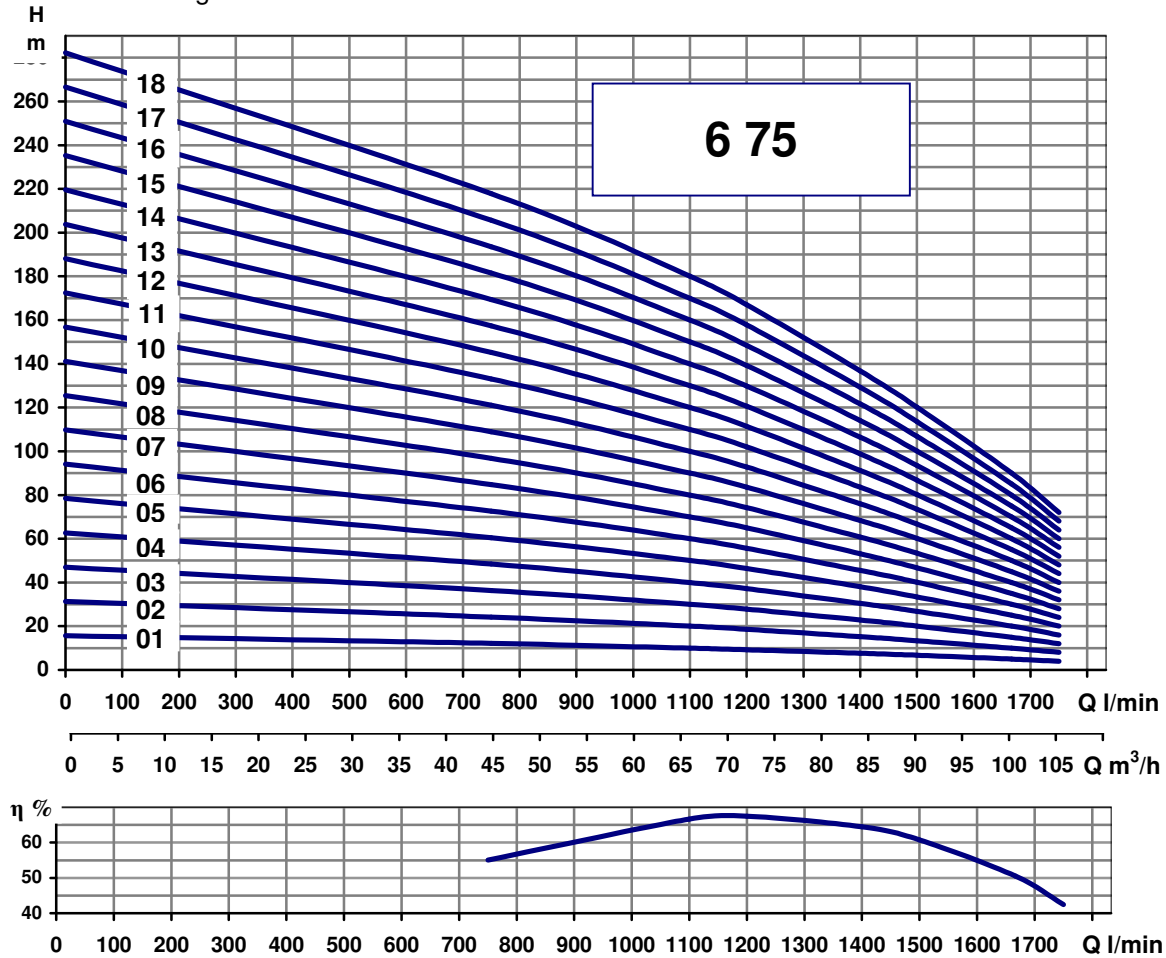

MODEL	MOTOR		Q - Flow								DIMENSIONS AND WEIGHT					
			m³/h	0	45	66	72	84	90	100	105	Motor	A	B	DN	kg
	kW	HP	l/min	0	750	1100	1200	1400	1500	1667	1750		mm	mm		
675 01	4	5,5	H - Manometric head (m)	16	12	10	9	8	7	5	4	6"	490	153	G 4"	21
675 02	5,5	7,5		31	24	20	19	15	13	10	8	6"	607	153	G 4"	27
675 03	9,3	12,5		47	36	30	28	23	20	15	12	6"	724	153	G 4"	33
675 04	11	15		63	48	40	37	30	27	20	16	6"	841	153	G 4"	39
675 05	13	17,5		78	61	50	46	38	33	25	20	6"	958	153	G 4"	45
675 06	15	20		94	73	60	56	46	40	30	24	6"	1075	153	G 4"	51
675 07	18,5	25		110	85	70	65	53	47	35	28	6"	1192	153	G 4"	57
675 08	22	30		125	97	80	74	61	53	40	32	6"	1309	153	G 4"	63
675 09	22	30		141	109	90	84	68	60	45	36	6"	1426	153	G 4"	69
675 10	26	35		157	121	100	93	76	67	50	40	6"	1543	153	G 4"	75
675 11	30	40		172	133	110	102	84	73	55	44	6"	1660	153	G 4"	81
675 12	30	40		188	145	120	111	91	80	60	48	6"	1777	153	G 4"	87
675 13	37	50		204	157	130	121	99	87	65	52	6"	1894	153	G 4"	93
675 14	37	50		220	169	140	130	106	94	70	56	6"	2011	153	G 4"	99
675 15	37	50		235	182	150	139	114	100	75	60	6"	2128	153	G 4"	105
675 16	45	60		251	194	160	148	122	107	80	64	6"	2245	153	G 4"	111
675 17	45	60		267	206	170	158	129	114	85	68	6"	2362	153	G 4"	117
675 18	45	60		282	218	180	167	137	120	90	72	6"	2479	153	G 4"	122