
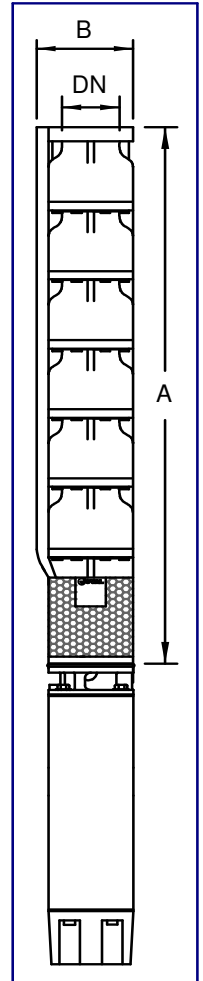


PERFORMANCE CURVES AT 2850 rpm

Tested according to standard ISO 9906

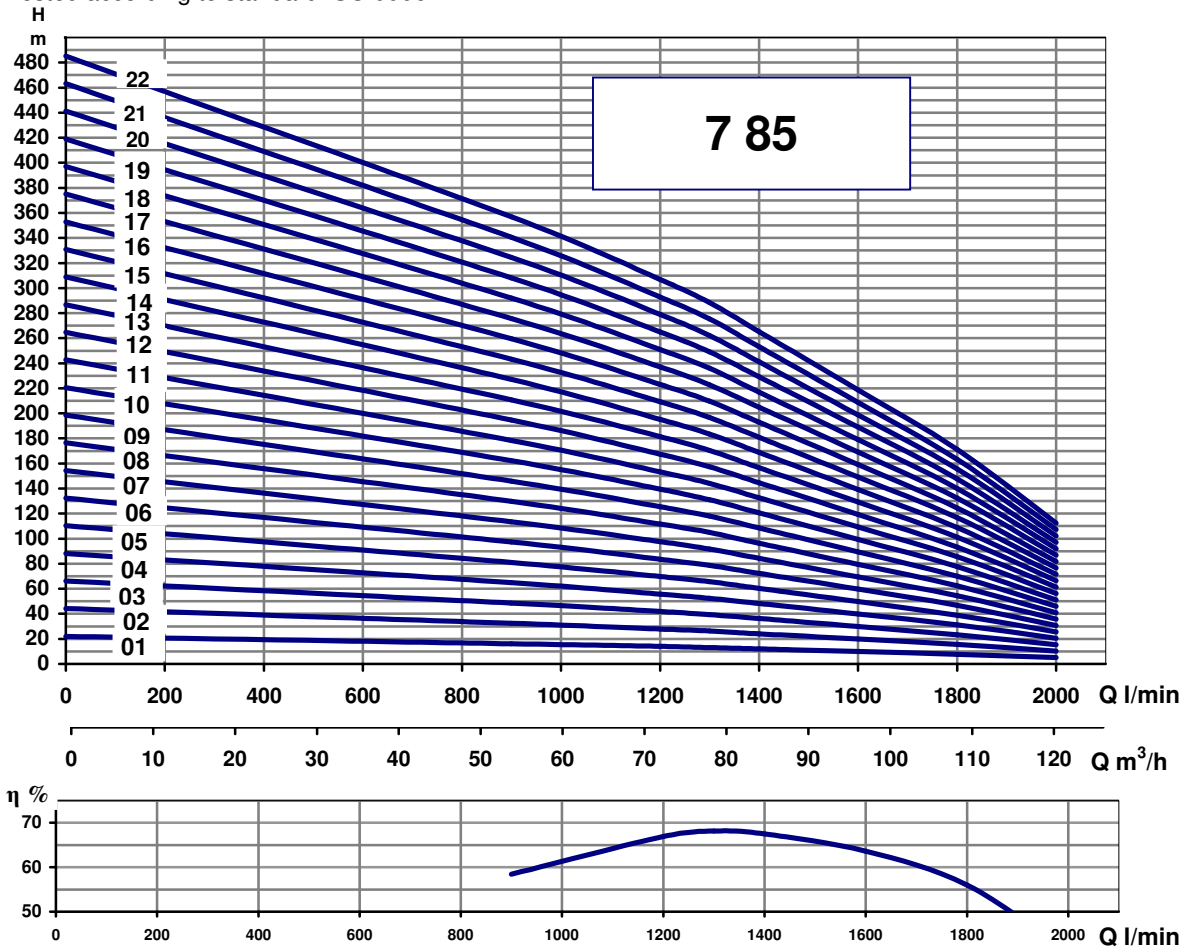

MODEL	MOTOR		Q - Flow								DIMENSIONS AND WEIGHT				
	kW	HP	m³/h	0	54	72	78	84	96	108	120	Motor	A	B	DN
			l/min	0	900	1200	1300	1400	1600	1800	2000				
			H - Manometric head (m)												
785 01	5,5	7,5	22	16	14	13	12	10	8	5	6"	543	180	G 4"	32
785 02	9,3	12,5	44	32	28	26	24	20	16	10	6"	678	180	G 4"	41
785 03	13	17,5	66	49	42	39	36	30	23	15	6"	813	180	G 4"	51
785 04	18,5	25	88	65	56	52	48	40	31	20	6"	948	180	G 4"	60
785 05	22	30	110	81	70	66	60	50	39	26	6"	1083	180	G 4"	70
785 06	26	35	132	97	84	79	72	60	47	31	6" / 8"	1218	180	G 4"	79
785 07	30	40	154	114	98	92	84	70	54	36	6" / 8"	1353	180	G 4"	89
785 08	37	50	176	130	112	105	96	80	62	41	6" / 8"	1488	180	G 4"	98
785 09	37	50	199	146	126	118	109	90	70	46	6" / 8"	1623	180	G 4"	108
785 10	45	60	221	162	139	131	121	99	78	51	8"	1758	180	G 4"	117
785 11	45	60	243	178	153	144	133	109	86	56	8"	1893	180	G 4"	127
785 12	52	70	265	195	167	157	145	119	93	61	8"	2028	180	G 4"	136
785 13	55	75	287	211	181	170	157	129	101	66	8"	2163	180	G 4"	146
785 14	60	80	309	227	195	184	169	139	109	72	8"	2298	180	G 4"	155
785 15	60	80	331	243	209	197	181	149	117	77	8"	2433	180	G 4"	165
785 16	66	90	353	260	223	210	193	159	124	82	8"	2568	180	G 4"	174
785 17	66	90	375	276	237	223	205	169	132	87	8"	2703	180	G 4"	184
785 18	75	100	397	292	251	236	217	179	140	92	8"	2838	180	G 4"	193
785 19	75	100	419	308	265	249	229	189	148	97	8"	2973	180	G 4"	203
785 20	93	125	441	324	279	262	241	199	156	102	8"	3108	180	G 4"	212
785 21	93	125	463	341	293	275	253	209	163	107	8"	3243	180	G 4"	222
785 22	93	125	485	357	307	288	265	219	171	112	8"	3378	180	G 4"	231