
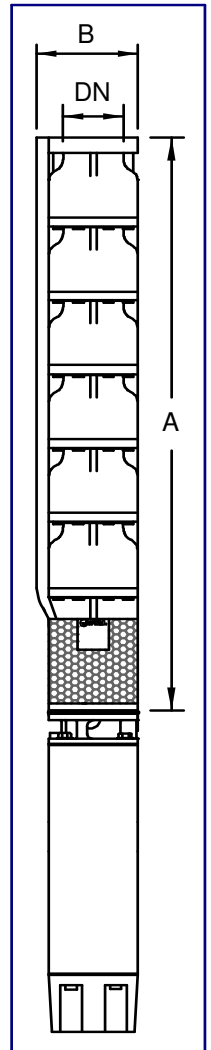


PERFORMANCE AT 2850 rpm

Tested according ISO 9906

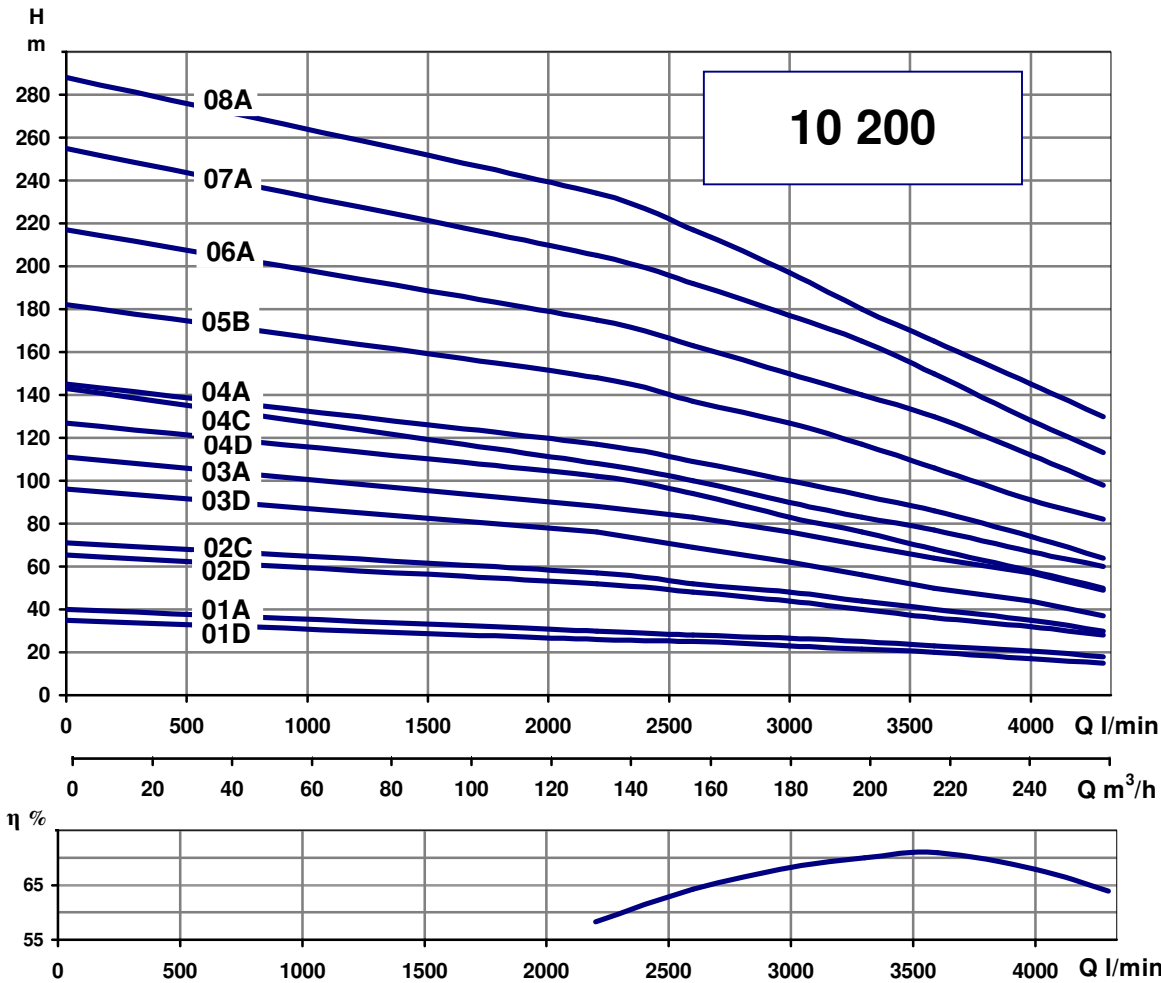

MODEL	MOTOR		Q - Flow								Dimensions and weight					
			m³/h	0	132	156	180	198	216	240	258	Motor	A	B	DN	kg
	kW	HP	l/min	0	2200	2600	3000	3300	3600	4000	4300		mm	mm		
10200 01D	15	20	H - Manometric height (m)								6"	770	250	G 6"	70	
10200 01A	18,5	25	35	26	25	23	22	20	17	15		6"	770	250	G 6"	70
10200 02D	30	40	40	30	28	27	25	23	21	18		6" / 8"	950	250	G 6"	92
10200 02C	37	50	66	52	48	44	40	36	32	28		6" / 8"	950	250	G 6"	92
10200 03D	45	60	71	57	52	48	44	40	35	30		6" / 8"	1130	250	G 6"	114
10200 03A	55	75	96	76	69	62	56	50	44	37		8"	1130	250	G 6"	114
10200 04D	60	80	111	88	83	76	70	64	57	49		8"	1310	250	G 6"	136
10200 04C	67	90	127	102	94	83	76	68	58	50		8"	1310	250	G 6"	136
10200 04A	75	100	143	108	100	90	83	77	67	60		8"	1310	250	G 6"	136
10200 05B	93	125	145	117	109	100	93	86	74	64		8"	1490	250	G 6"	158
10200 06A	110	150	182	148	137	127	117	106	91	82		8"/10"	1670	250	G 6"	180
10200 07A	130	175	217	175	163	150	140	130	112	98		8"/10"	1850	250	G 6"	202
10200 08A	150	200	255	205	192	177	165	150	128	113		8"/10"	2030	250	G 6"	224
10200 08A	150	200	288	234	217	197	180	165	145	130		8"/10"	2030	250	G 6"	224