
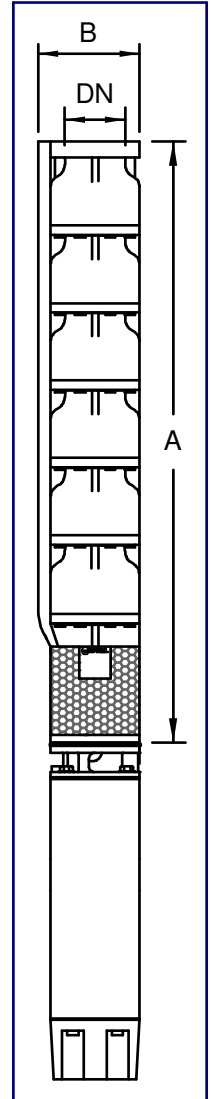


PERFORMANCE CURVES AT 2850 rpm

Tested according ISO 9906

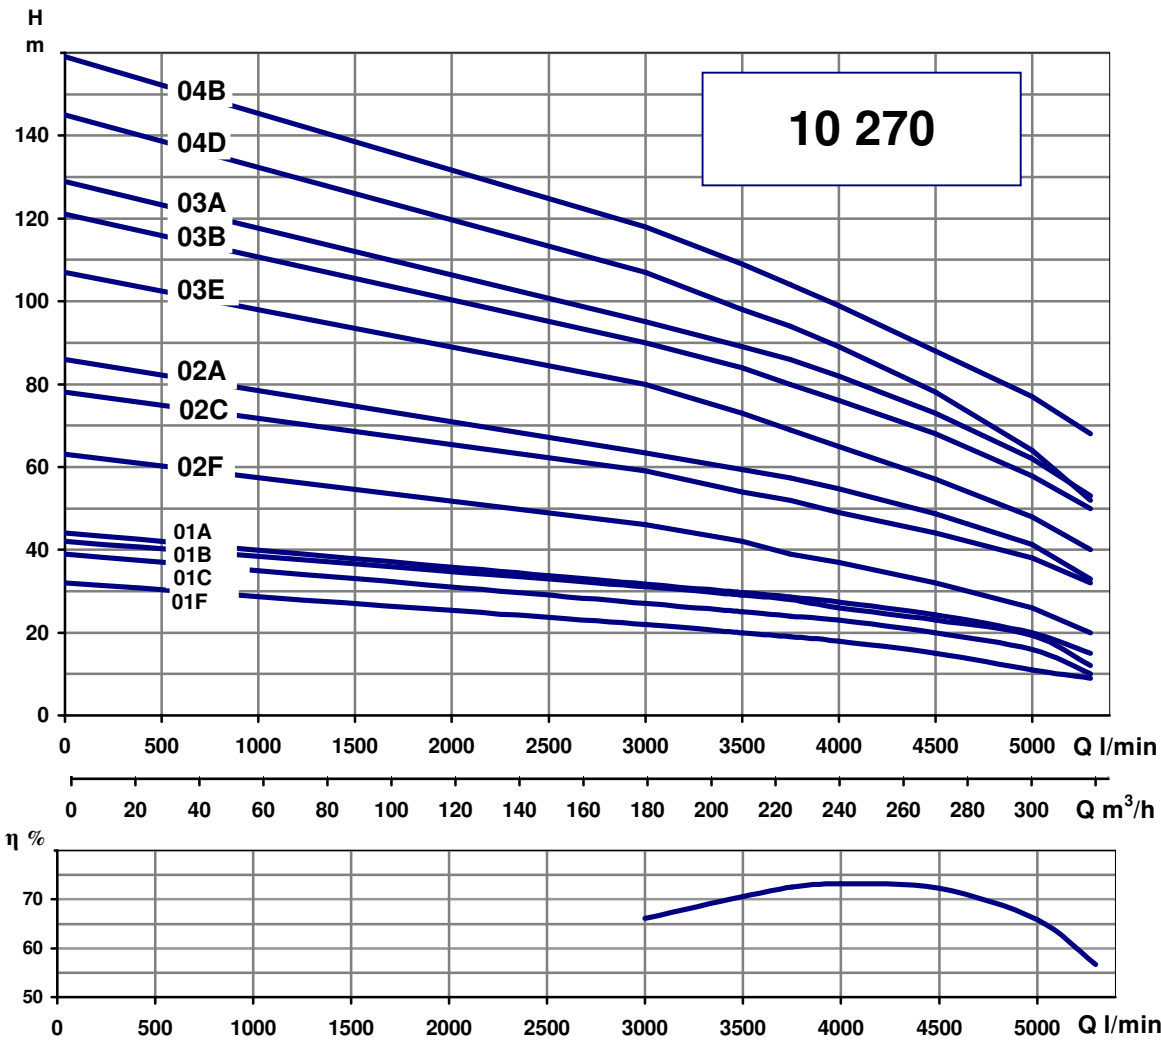

MODEL	MOTOR		Q - Flow								Dimensions and weight					
			m³/h	0	180	210	225	240	270	300	318	Motor	A	B	DN	Kg
	kW	HP	l/min	0	3000	3500	3750	4000	4500	5000	5300		mm	mm		
10270 01F	18,5	25	H - Manometric head (m)	32	22	20	19	18	15	11	9	6"	770	250	G 6"	70
10270 01C	22	30		39	27	25	24	23	20	16	10	6"	770	250	G 6"	70
10270 01B	26	35		42	31	29	28	26	23	19	12	6"	770	250	G 6"	70
10270 01A	30	40		44	32	30	29	27	24	20	15	6" / 8"	770	250	G 6"	70
10270 02F	37	50		63	46	42	39	37	32	26	20	6" / 8"	950	250	G 6"	92
10270 02C	45	60		78	59	54	52	49	44	38	32	6" / 8"	950	250	G 6"	92
10270 02A	55	75		86	63	59	57	55	49	41	33	8"	950	250	G 6"	92
10270 03E	60	80		107	80	73	69	65	57	48	40	8"	1130	250	G 6"	114
10270 03B	66	90		121	90	84	80	76	68	58	50	8"	1130	250	G 6"	114
10270 03A	75	100		129	95	89	86	82	73	62	53	8"	1130	250	G 6"	114
10270 04D	81	110		145	107	98	94	89	78	64	52	8"	1310	250	G 6"	136
10270 04B	93	125		159	118	109	104	99	88	77	68	8"/10"	1310	250	G 6"	136