
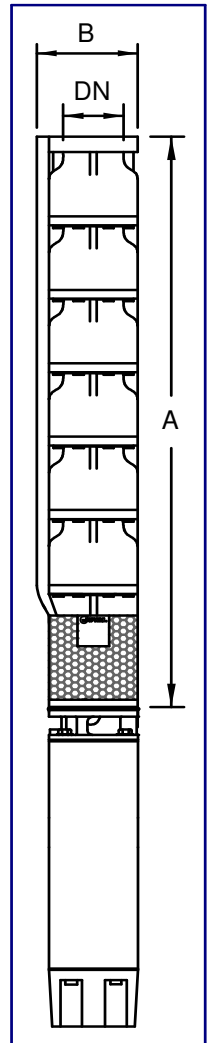


PERFORMANCE CURVES AT 2850 rpm

Tested according to standard ISO 9906

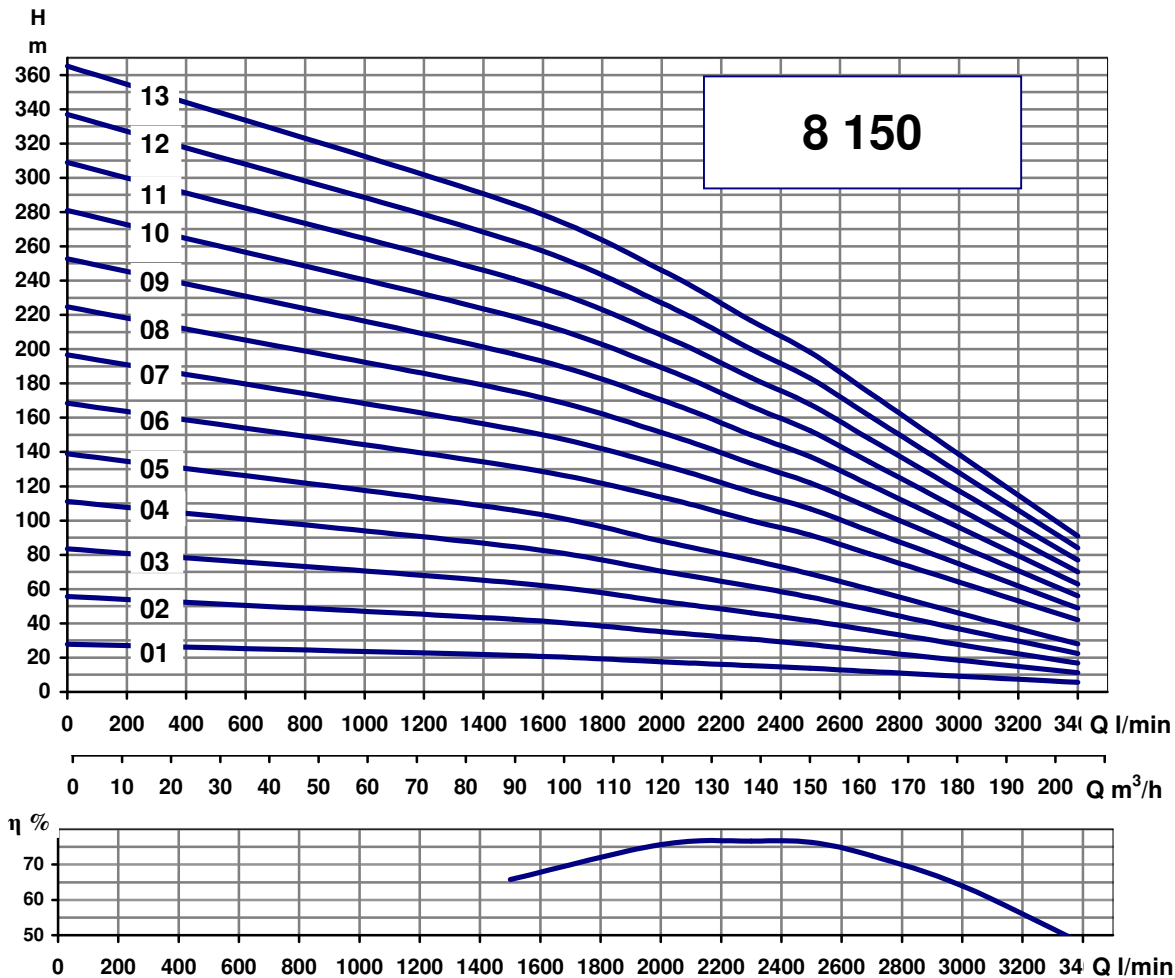

MODEL	MOTOR		Q - Flow								DIMENSIONS AND WEIGHT					
			m³/h	0	90	120	138	150	162	180	204	Motor	A	B	DN	Kg
	KW	HP	l/min	0	1500	2000	2300	2500	2700	3000	3400		mm	mm		
			H - Manometric head (m)													
8150 01	9,3	12,5	28	21	18	15	14	12	9	6	6"	560	200	G 5"	37	
8150 02	18,5	25	56	42	35	31	28	24	18	11	6"	705	200	G 5"	49	
8150 03	26	35	83	64	53	46	41	36	28	17	6"	850	200	G 5"	61	
8150 04	37	50	111	85	70	62	55	48	37	22	6" / 8"	995	200	G 5"	74	
8150 05	45	60	139	106	88	77	69	60	46	28	6" / 8"	1140	200	G 5"	86	
8150 06	55	75	169	132	114	100	92	81	64	42	8"	1285	200	G 5"	98	
8150 07	66	90	197	153	132	117	107	94	75	49	8"	1430	200	G 5"	110	
8150 08	75	100	225	175	151	133	122	107	85	56	8"	1575	200	G 5"	122	
8150 09	75	100	253	197	170	150	137	121	96	63	8"	1720	200	G 5"	135	
8150 10	93	125	281	219	189	167	153	134	107	70	8"	1865	200	G 5"	147	
8150 11	93	125	309	241	208	183	168	148	117	77	8"	2010	200	G 5"	159	
8150 12	110	150	337	263	227	200	183	161	128	84	8" / 10"	2155	200	G 5"	171	
8150 13	110	150	365	285	246	217	198	174	139	91	8" / 10"	2300	200	G 5"	184	